

De nieuwe BMW 1 Reeks. Inhoudsopgave.



1. Compact rijplezier – efficiënt, innovatief, uniek. De nieuwe BMW 1 Reeks.	
(Korte versie)	2
2. Technische specificaties.	
(Engels)	5

1. De nieuwe BMW 1 Reeks. (Korte versie)



Een sterk gewijzigde voor- en achterkant, een verfijnde en premium sfeer in het interieur en ongekeende vermogensreserves onder de kap: dat zijn de hoofdkenmerken van de nog expressievere, sportievere en aerodynamischere nieuwe BMW 1 Reeks (normverbruik over de gemengde cyclus: 8,0 – 3,4 l/100 km; CO₂-emissies over de gemengde cyclus: 188 – 89 g/km). De voorbije tien jaar werden wereldwijd bijna twee miljoen exemplaren van de BMW 1 Reeks aan de man gebracht en deze jongste editie zal de lat inzake rijplezier nog hoger leggen in het segment van de compacte premiumwagens. De 3- en 5-deursversies van de nieuwe BMW 1 Reeks kunnen schermen met een volledig nieuw motorgamma en andere ingrepen om het verbruik en de emissies terug te dringen. Ze vestigen alweer nieuwe normen dankzij de introductie van nieuwe BMW EfficientDynamics-technologie.

Het motorgamma van de nieuwe BMW 1 Reeks werd uitgebreid met de allernieuwste drie- en viercilinder diesel- en benzinemotoren van het merk. De koppellijke en hoogtoerige krachtbronnen met BMW TwinPower Turbo-technologie werken samen met de achterwielaandrijving – nog steeds een unieke verkooptroef in het segment van de compacte wagens – om het merktypische rijplezier te garanderen. Ook de nog uitgebreidere standaarduitrusting, de vermogensboost voor de zescilinder-in-lijn van de BMW M135i M Performance wagen en de baanbrekende innovaties van BMW ConnectedDrive versterken de bekende BMW kwaliteiten.

Nieuw koetswerk- en interieurdesign met bekende BMW stijlelementen die sportieve prestaties en prestige uitstralen.

Nauwkeurig uitgekiende updates aan het koetswerkdesign van de nieuwe BMW 1 Reeks zetten zijn sportieve elegantie en hoogwaardige uitstraling extra in de verf. Het nieuwe ontwerp van het radiatorrooster met BMW nieren en de grotere luchtinlaat helpen het dynamische potentieel te benadrukken in de bekende BMW stijl. Ook de koplampen met gevoelig vlakkere geometrie dragen daartoe bij. Ze beschikken standaard over LED-dagrijlichten en kunnen als optie zelfs als full-LED's worden geleverd. De achterlichten werden eveneens ingrijpend herwerkt. Ze hebben voortaan de typische 'L'-vorm van BMW modellen en maken gebruik van LED-technologie. Binnenin wordt de prestigieuze sfeer in de nieuwe BMW 1 Reeks nog versterkt door het elegante bovenste deel van de middenconsole met de bedieningselementen voor de radio en airconditioning.

Automatische airconditioning, radio Professional en BMW iDrive standaard gemonteerd, nieuwe uitrustingsversies.

De nieuwe BMW 1 Reeks is standaard uitgerust met een automatische airconditioning, een regensensor, de radio Professional en het iDrive-besturingssysteem, compleet met vrijstaand 6,5"-hogeresolutiescherm bovenaan de middenconsole.

Mogelijke alternatieven voor de standaarduitvoering zijn de modellen Advantage, Sport, Urban en M Sport, die nieuwe mogelijkheden bieden voor een gerichte personalisering.

Nieuwe motorgeneratie, nieuwe normen inzake efficiëntie.

Met het ingrijpend vernieuwde motorgamma en de uitgebreide BMW EfficientDynamics-technologie legt de nieuwe BMW 1 Reeks de lat in zijn klasse opnieuw een stuk hoger door het verbruik en de emissies nog verder terug te dringen. Kopers van de BMW 1 Reeks kunnen voortaan kiezen uit diverse drie- en viercilinder motoren uit de nieuwe motorfamilie van de BMW Group. De nieuwe zuinigheidsreferentie in het gamma is de BMW 116d EfficientDynamics Edition met 85 kW/116 pk, goed voor een gemiddeld verbruik van 3,4 l/100 km en een CO₂-uitstoot van 89 g/km over de Europese normcyclus.

De standaard manuele versnellingsbak kan als optie worden vervangen door een 8-versnellingsbak Steptronic (standaard op de BMW 125d, BMW 120d xDrive en BMW M135i xDrive). De nieuwste versie van deze automaat ondersteunt de transmissiesturing met navigatiegegevens.

Dankzij het 5 kW hogere vermogen (240 kW/326 pk) van zijn zescilinder-in-lijn kan de nieuwe BMW M135i (gemiddeld brandstofverbruik: 8,0 l/100 km; CO₂-emissies over de gemengde cyclus: 188 g/km) zijn positie als prestatiegericht elitemodel in het competitieve segment van de BMW 1 Reeks. Net als de BMW 120d en BMW 118d kan de BMW M Performance wagen ook worden uitgerust met de intelligente vierwielaandrijving xDrive, die niet alleen de tractie en rechthoudstabiliteit ten goede komt maar ook de dynamiek van de wagen verbetert. De nieuwe BMW M135i xDrive (gemiddeld brandstofverbruik: 7,8 l/100 km; CO₂-emissies over de gemengde cyclus: 182 g/km) sprint in nauwelijks 4,7 seconden van 0 naar 100 km/u.

Geavanceerde chassistechnologie, bandenspanningsindicator standaard voorzien.

De geavanceerde chassistechnologie werkt samen met de achterwielaandrijving en een nagenoeg perfecte gewichtsverdeling (50: 50) tussen de voor- en achteras om de nieuwe BMW 1 Reeks zijn onmiskenbare weggedrag te geven dat wendbaarheid en dynamiek centraal stelt. Op de optielijst staan onder meer de adaptieve ophanging, de M sportophanging, Variable Sport Steering en het M sportremsysteem. Een bandenspanningsindicator met weergave van de waarde per wiel behoort voortaan tot de standaarduitrusting.

Nieuwe rijhulpsystemen en diensten van BMW ConnectedDrive.

Het gamma optionele rijhulpsystemen van BMW ConnectedDrive die leverbaar zijn op de BMW 1 Reeks omvat nu ook de Active Cruise Control met radartechnologie en Stop&Go functie. Park Assist van de jongste generatie maakt het voortaan mogelijk om parallel met de weg te parkeren in krappe parkeerplaatsen die aan een of twee kanten zijn begrensd en om haaks op de weg te parkeren. Voorzieningen zoals de Driving Assistant met camera, de achteruitrijcamera en de Speed Limit Info met No Passing Info zijn eveneens verkrijgbaar.

Alle versies van de nieuwe BMW 1 Reeks zijn standaard uitgerust met een geïntegreerde SIM-kaart die het gebruik van de (eveneens standaard geleverde) intelligente noodoproep en BMW TeleServices mogelijk maken en de inzittenden toegang geven tot optionele online mobiliteitsdiensten. Behalve BMW Online en Real Time Traffic Information kunnen klanten ook gebruikmaken van de online entertainmentfunctie. Andere online diensten kunnen in de wagen worden geïntegreerd door middel van smartphone-apps en worden veilig, intuïtief en eenvoudig bediend via het iDrive-systeem. Het nieuwe navigatiesysteem Professional biedt ook automatische kaartupdates via een mobiele telefoon en de geïntegreerde SIM-kaart. Deze dienst wordt gratis aangeboden gedurende de eerste drie jaar na de registratie.

Meer informatie over de officiële CO₂-uitstoot, de brandstofwaarden en het elektriciteitsverbruik van nieuwe personenwagens is opgenomen in de "Gids CO₂", die gratis te verkrijgen is in elk verkooppunt of bij de Federale Overheidsdienst Volksgezondheid, Veiligheid van de Voedselketen en Leefmilieu, Directoraat-Generaal Leefmilieu (Victor Hortaplein 40 bus 10 te 1060 Brussel).

2. Technical specifications. BMW 116i 3-door.



BMW 116i 3-door		
Body		
No. of doors/seats		3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1535 / 1569
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.7
Engine oil ²⁾	ltr	4.25
Weight, unladen, to DINEU	kg	1300 / 1375
Max. load to DIN	kg	565
Max. permissible weight	kg	1865
Max. axle load, front/rear	kg	850 / 1090
Max. trailer load, braked (12%)/unbraked	kg	1200 / 650
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.31 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1499
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	11.0
Fuel		min RON 91
Max. output	kW/hp	80 / 109
at	rpm	4500 – 6000
Max torque	Nm	180
at	rpm	1250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	AW	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear		195/55 R16 87H
Rims, front/rear		6.5J x 16 steel

BMW 116i 3-door			
Transmission			
Type of transmission		6-speed manual	
Gear ratios	I	:1	4.552
	II	:1	2.548
	III	:1	1.659
	IV	:1	1.230
	V	:1	1.000
	VI	:1	0.830
	R	:1	4.138
Final drive		:1	2.813
Performance			
Power-to-weight ratio		kg/kW	16.3
Output per litre		kW/ltr	53.4
Acceleration	0–100 km/h	s	10.9
in 5th gear	80–120 km/h	s	14.8
Top speed		km/h	195
BMW EfficientDynamics			
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, tyres with reduced roll resistance	
Fuel Consumption EU ³⁾			
With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres			
Urban	ltr/100 km		6.3
Extra-urban	ltr/100 km		4.2
Combined	ltr/100 km		5.0
CO ₂	g/km		116
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear			
Urban	ltr/100 km		6.7
Extra-urban	ltr/100 km		4.5
Combined	ltr/100 km		5.3
CO ₂	g/km		123
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear			
Urban	ltr/100 km		6.8
Extra-urban	ltr/100 km		4.6
Combined	ltr/100 km		5.4
CO ₂	g/km		126
Emission rating		EU6	

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emissions depend on the selected tyre format

BMW 118i 3-door, BMW 120i 3-door.

		BMW 118i 3-door	BMW 120i 3-door
Body			
No. of doors/seats		3 / 4 (5)	3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1535 / 1569	1535 / 1569
Ground clearance	mm	140	140
Turning circle	m	10.9	10.9
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	6.4	6.4
Engine oil ²⁾	ltr	4.2	4.2
Weight, unladen, to DIN/EU	kg	1300 / 1375 (1315 / 1390)	1300 / 1375 (1315 / 1390)
Max. load to DIN	kg	565	565
Max. permissible weight	kg	1865 (1880)	1865 (1880)
Max. axle load, front/rear	kg	865 / 1090	870 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1200 / 670	1200 / 670
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.31 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1598	1598
Stroke/bore	mm	85.8 / 77.0	85.8 / 77.0
Compression ratio	:1	10.5	10.5
Fuel		min RON 91	min RON 91
Max. output	kW/hp	100 / 136	130 / 177
at	rpm	4400 – 6450	4800 – 6450
Max torque	Nm	220	250
at	rpm	1350 – 4300	1500 – 4500
Electrical System			
Battery/installation	Ah/–	80 / luggage comp.	80 / luggage comp.
Alternator	A/W	170 / 2380	170 / 2380
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.0
Tyres, front/rear		195/55 R16 87H	195/55 R16 87W
Rims, front/rear		6.5J x 16 steel	6.5J x 16 steel

			BMW 118i 3-door	BMW 120i 3-door
Transmission				
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)		
Gear ratios	I	:1	4.552 (4.714)	4.552 (4.714)
	II	:1	2.548 (3.143)	2.548 (3.143)
	III	:1	1.659 (2.106)	1.659 (2.106)
	IV	:1	1.230 (1.667)	1.230 (1.667)
	V	:1	1.000 (1.285)	1.000 (1.285)
	VI	:1	0.830 (1.000)	0.830 (1.000)
	VII	:1	– (0.839)	– (0.839)
	VIII	:1	– (0.667)	– (0.667)
	R	:1	4.138 (3.295)	4.138 (3.295)
Final drive		:1	2.813 (3.077)	3.077 (3.077)
Performance				
Power-to-weight ratio	kg/kW		13.0 (13.2)	10.0 (10.1)
Output per litre	kW/ltr		62.6	81.4
Acceleration	0–100 km/h	s	8.5 (8.7)	7.4 (7.2)
in 5th gear	80–120 km/h	s	10.6 (–)	8.8 (–)
Top speed	km/h		210 (210)	225 (222)
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, tyres with reduced roll resistance		
Fuel Consumption EU ³⁾				
With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres				
Urban	ltr/100 km		7.0 (7.2)	7.4 (7.1)
Extra-urban	ltr/100 km		4.5 (4.6)	4.7 (4.6)
Combined	ltr/100 km		5.4 (5.6)	5.7 (5.6)
CO ₂	g/km		125 (129)	132 (129)
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban	ltr/100 km		7.2 (7.4)	7.6 (7.4)
Extra-urban	ltr/100 km		4.6 (4.8)	4.8 (4.8)
Combined	ltr/100 km		5.6 (5.7)	5.8 (5.7)
CO ₂	g/km		129 (133)	136 (133)
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban	ltr/100 km		7.4 (7.6)	7.8 (7.6)
Extra-urban	ltr/100 km		4.7 (4.9)	4.9 (4.9)
Combined	ltr/100 km		5.7 (5.9)	6.0 (5.9)
CO ₂	g/km		133 (137)	139 (137)
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emissions depend on the selected tyre format

BMW 125i 3-door.

BMW 125i 3-door		
Body		
No. of doors/seats		3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1521 / 1556
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0 (7.6)
Engine oil ²⁾	ltr	5.0
Weight, unladen, to DIN/EU	kg	1350 / 1425 (1370 / 1445)
Max. load to DIN	kg	565
Max. permissible weight	kg	1915 (1935)
Max. axle load, front/rear	kg	895 / 1120
Max. trailer load, braked (12%/unbraked)	kg	1200 / 680
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.32 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 4 / 4
Engine technology	BMW TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1997
Stroke/bore	mm	90.1 / 84.0
Compression ratio	:1	10.0
Fuel		min RON 91
Max. output	kW/hp	160 / 218
at	rpm	5000
Max torque	Nm	310
at	rpm	1350 – 4800
Electrical System		
Battery/installation	Ah/–	80 / luggage comp.
Alternator	AW	170 / 2380
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/50 R17 89Y	
Rims, front/rear	7J x 17 light-alloy	

BMW 125i 3-door			
Transmission			
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)	
Gear ratios	I	:1	3.683 (4.714)
	II	:1	2.062 (3.143)
	III	:1	1.313 (2.106)
	IV	:1	1.000 (1.667)
	V	:1	0.809 (1.285)
	VI	:1	0.677 (1.000)
	VII	:1	– (0.839)
	VIII	:1	– (0.667)
	R	:1	3.348 (3.295)
Final drive		:1	3.909 (3.077)
Performance			
Power-to-weight ratio		kg/kW	8.4 (8.6)
Output per litre		kW/ltr	80.1
Acceleration	0–100 km/h	s	6.4 (6.2)
	in 5th gear 80–120 km/h	s	7.5
Top speed		km/h	245 (243)
BMW EfficientDynamics			
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, tyres with reduced roll resistance	
Fuel Consumption EU ³⁾			
With standard tyres			
Urban	ltr/100 km	8.6 (8.5)	
Extra-urban	ltr/100 km	5.4 (5.1)	
Combined	ltr/100 km	6.6 (6.3)	
CO ₂	g/km	154 (148)	
With rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear, with rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear			
Urban	ltr/100 km	8.9 (8.7)	
Extra-urban	ltr/100 km	5.4 (5.2)	
Combined	ltr/100 km	6.7 (6.5)	
CO ₂	g/km	157 (151)	
Emission rating		EU6	

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel economy and CO₂ emission figures depend on the selected tyre format

BMW M135i 3-door, BMW M135i xDrive 3-door

		BMW M135i 3-door	BMW M135i xDrive 3-door
Body			
No. of doors/seats		3 / 4 (5)	3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4324 / 1765 / 1411	4324 / 1765 / 1411
Wheelbase	mm	2690	2690
Track, front/rear	mm	1516 / 1534	1516 / 1534
Ground clearance	mm	130	130
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	6.9 (7.1)	7.1
Engine oil ²⁾	ltr	6.5	6.5
Weight, unladen, to DIN/EU	kg	1430 / 1505 (1445 / 1520)	1515 / 1590
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1995 (2010)	2065
Max. axle load, front/rear	kg	955 / 1120	1010 / 1120
Max. trailer load, braked (12%/unbraked)	kg	– / –	– / –
Max. roof load/max towbar download	kg	75 / –	75 / –
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.34 x 2.14	0.35 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 6 / 4	in-line / 6 / 4
Engine technology		M Performance TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	2979	2979
Stroke/bore	mm	89.6 / 84.0	89.6 / 84.0
Compression ratio	:1	10.2	10.2
Fuel		min RON 91	min RON 91
Max. output	kW/hp	240 / 326	240 / 326
at	rpm	5800 – 6000	5800 – 6000
Max torque	Nm	450	450
at	rpm	1300 – 4500	1300 – 4500
Electrical System			
Battery/installation	Ah/–	80 / luggage comp.	80 / luggage comp.
Alternator	A/W	170 / 2380	170 / 2380
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle with M-specific elastokinematics	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Four-piston fixed-calliper disc brakes	
Brakes, rear		Twin-piston fixed-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW M135i xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), variable sport steering incl. Servotronic function	
Steering ratio, overall	:1	14.5	14.6
Tyres, front/rear		225/40 ZR18 88Y/ 245/35 ZR18 92Y XL	225/40 ZR18 88Y/ 245/35 ZR18 92Y XL
Rims, front/rear		7.5J x 18 light-alloy/ 8J x 18 light-alloy	7.5J x 18 light-alloy/ 8J x 18 light-alloy

BMW M135i 3-door			BMW M135i xDrive 3-door	
Transmission				
Type of transmission			6-speed manual (optional: 8-speed Steptronic sport transmission)	8-speed Steptronic sport transmission
Gear ratios	I	:1	4.110 (4.714)	4.714
	II	:1	2.315 (3.143)	3.143
	III	:1	1.542 (2.106)	2.106
	IV	:1	1.179 (1.667)	1.667
	V	:1	1.000 (1.285)	1.285
	VI	:1	0.846 (1.000)	1.000
	VII	:1	– (0.839)	0.839
	VIII	:1	– (0.667)	0.667
	R	:1	3.727 (3.295)	3.295
Final drive		:1	3.077 (3.077)	3.077
Performance				
Power-to-weight ratio		kg/kW	6.0 (6.0)	6.3
Output per litre		kW/ltr	80.6	80.6
Acceleration	0–100 km/h	s	5.1 (4.9)	4.7
in 5th gear	80–120 km/h	s	5.0 (–)	–
Top speed		km/h	250 (250)	250
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW M135i xDrive), tyres with reduced roll resistance		
Fuel Consumption EU				
Urban	ltr/100 km		10.9 (10.3)	10.8
Extra-urban	ltr/100 km		6.4 (5.9)	6.1
Combined	ltr/100 km		8.0 (7.5)	7.8
CO ₂	g/km		188 (175)	182
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
 BMW M135i: figures in brackets apply to automatic transmission (standard in the BMW M135i xDrive)

¹⁾ Height with roof fin: 1430 mm

²⁾ Oil change

BMW 116d 3-door.

BMW 116d 3-door		
Body		
No. of doors/seats		3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1535 / 1569
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	4.4
Weight, unladen, to DIN/EU	kg	1320 / 1395 (1350 / 1425)
Max. load to DIN	kg	565
Max. permissible weight	kg	1885 (1915)
Max. axle load, front/rear	kg	885 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 690
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.30 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1496
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	85 / 116
at	rpm	4000
Max torque	Nm	270
at	rpm	1750 – 2250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear		195/55 R16 87H
Rims, front/rear		6.5J x 16 steel

BMW 116d 3-door**Transmission**

Type of transmission	6-speed manual (optional: 8-speed Steptronic transmission)		
Gear ratios	I	:1	4.002 (5.000)
	II	:1	2.130 (3.200)
	III	:1	1.396 (2.143)
	IV	:1	1.000 (1.720)
	V	:1	0.781 (1.314)
	VI	:1	0.668 (1.000)
	VII	:1	– (0.822)
	VIII	:1	– (0.640)
	R	:1	3.647 (3.456)
Final drive		:1	3.077 (2.647)

Performance

Power-to-weight ratio	kg/kW	15.5 (15.9)
Output per litre	kW/ltr	56.8
Acceleration 0–100 km/h	s	10.3 (10.3)
in 5th gear 80–120 km/h	s	11.7
Top speed	km/h	200 (200)

BMW EfficientDynamics

BMW EfficientDynamics
standard features

Brake Energy Regeneration with recuperation display,
Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift
Indicator, ECO PRO mode, intelligent lightweight construction, optimised
aerodynamic attributes, on-demand operation of ancillary units, map-
controlled oil pump, detachable a/c compressor, final drive with optimised
warm-up behaviour, tyres with reduced roll resistance

Fuel Consumption EU ³⁾

With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres

Urban	ltr/100 km	4.3 (4.1)
Extra-urban	ltr/100 km	3.3 (3.4)
Combined	ltr/100 km	3.7 (3.6)
CO ₂	g/km	97 (96)

With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17,
with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear

Urban	ltr/100 km	4.7 (4.4)
Extra-urban	ltr/100 km	3.6 (3.6)
Combined	ltr/100 km	4.0 (3.9)
CO ₂	g/km	104 (103)

With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear

Urban	ltr/100 km	4.8 (4.6)
Extra-urban	ltr/100 km	3.7 (3.8)
Combined	ltr/100 km	4.1 (4.1)
CO ₂	g/km	107 (107)

Emission rating	EU6
-----------------	-----

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 116d EfficientDynamics Edition 3-door.

BMW 116d EfficientDynamics Edition 3-door		
Body		
No. of doors/seats		3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1413
Wheelbase	mm	2690
Track, front/rear	mm	1523 / 1558
Ground clearance	mm	132
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	4.4
Weight, unladen, to DIN/EU	kg	1320 / 1395
Max. load to DIN	kg	565
Max. permissible weight	kg	1885
Max. axle load, front/rear	kg	855 / 1090
Max. trailer load, braked (12%)/unbraked	kg	– / –
Max. roof load/max towbar download	kg	75 / –
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.29 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1496
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	85 / 116
at	rpm	4000
Max torque	Nm	270
at	rpm	1750 – 2250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/55 R16 91V	
Rims, front/rear	7J x 16 steel	

BMW 116d EfficientDynamics Edition 3-door**Transmission**

Type of transmission	6-speed manual	
Gear ratios	I	:1
	II	:1
	III	:1
	IV	:1
	V	:1
	VI	:1
	R	:1
Final drive		:1

Performance

Power-to-weight ratio	kg/kW	15.5
Output per litre	kW/ltr	56.8
Acceleration 0–100 km/h	s	10.4
in 5th gear 80–120 km/h	s	12.9
Top speed	km/h	195

BMW EfficientDynamics

BMW EfficientDynamics standard features	Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, tyres with reduced roll resistance
---	---

Fuel Consumption EU ³⁾

With standard tyres		
Urban	ltr/100 km	3.9
Extra-urban	ltr/100 km	3.1
Combined	ltr/100 km	3.4
CO ₂	g/km	89
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear as well as winter tyres		
Urban	ltr/100 km	4.3
Extra-urban	ltr/100 km	3.4
Combined	ltr/100 km	3.7
CO ₂	g/km	98
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear		
Urban	ltr/100 km	4.4
Extra-urban	ltr/100 km	3.5
Combined	ltr/100 km	3.8
CO ₂	g/km	101
Emission rating		EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1432 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 118d 3-door, BMW 118d xDrive 3-door.

		BMW 118d 3-door	BMW 118d xDrive 3-door
Body			
No. of doors/seats		3 / 4 (5)	3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1535 / 1569	1522 / 1556
Ground clearance	mm	140	140
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	7.0	7.0
Engine oil ²⁾	ltr	5.0	5.0
Weight, unladen, to DIN/EU	kg	1350 / 1425 (1375 / 1450)	1420 / 1495
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1915 (1940)	1970
Max. axle load, front/rear	kg	900 / 1090	940 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 690	1500 / 710
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.30 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1995	1995
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0
Compression ratio	:1	16.5	16.5
Fuel		diesel	diesel
Max. output	kW/hp	110 / 150	110 / 150
at	rpm	4000	4000
Max torque	Nm	320	320
at	rpm	1500 – 3000	1500 – 3000
Electrical System			
Battery/installation	Ah/–	90 / luggage comp.	90 / luggage comp.
Alternator	A/W	150 / 2100	150 / 2100
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW 118d xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.1
Tyres, front/rear		195/55 R16 87W	205/55 R16 91V
Rims, front/rear		6.5J x 16 steel	7J x 16 steel

			BMW 118d 3-door	BMW 118d xDrive 3-door
Transmission				
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)		6-speed manual
Gear ratios	I	:1	4.002 (5.000)	4.110
	II	:1	2.130 (3.200)	2.248
	III	:1	1.396 (2.143)	1.403
	IV	:1	1.000 (1.720)	1.000
	V	:1	0.781 (1.314)	0.802
	VI	:1	0.668 (1.000)	0.659
	VII	:1	– (0.822)	–
	VIII	:1	– (0.640)	–
	R	:1	3.647 (3.456)	3.727
Final drive		:1	3.077 (2.647)	3.154
Performance				
Power-to-weight ratio		kg/kW	12.3 (12.5)	12.9
Output per litre		kW/ltr	55.1	55.1
Acceleration	0–100 km/h	s	8.3 (8.1)	8.4
in 5th gear	80–120 km/h	s	9.2 (–)	9.5
Top speed		km/h	212 (212)	210
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW 118d xDrive), tyres with reduced roll resistance		
Fuel Consumption EU ³⁾				
With standard tyres				
Urban	ltr/100 km		5.0 (4.7)	5.1
Extra-urban	ltr/100 km		3.6 (3.6)	3.8
Combined	ltr/100 km		4.1 (4.0)	4.3
CO ₂	g/km		109 (105)	113
With rims 7J x 16 and tyres 205/55 R16 (BMW 118d), with rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban	ltr/100 km		4.8 (4.5)	5.4
Extra-urban	ltr/100 km		3.5 (3.4)	4.0
Combined	ltr/100 km		4.0 (3.8)	4.5
CO ₂	g/km		104 (99)	119
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban	ltr/100 km		5.2 (4.9)	5.6
Extra-urban	ltr/100 km		3.8 (3.8)	4.1
Combined	ltr/100 km		4.3 (4.2)	4.7
CO ₂	g/km		114 (110)	123
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
BMW 118d: figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 120d 3-door, BMW 120d xDrive 3-door.

		BMW 120d 3-door	BMW 120d xDrive 3-door
Body			
No. of doors/seats		3 / 4 (5)	3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1521 / 1556	1522 / 1556
Ground clearance	mm	140	140
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	7.0	7.0
Engine oil ²⁾	ltr	5.0	5.0
Weight, unladen, to DIN/EU	kg	1370 / 1445 (1385 / 1460)	1450 / 1525
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1935 (1950)	2000
Max. axle load, front/rear	kg	900 / 1090	975 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 710	1500 / 750
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.30 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1995	1995
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0
Compression ratio	:1	16.5	16.5
Fuel		diesel	diesel
Max. output	kW/hp	140 / 190	140 / 190
at	rpm	4000	4000
Max torque	Nm	400	400
at	rpm	1750 – 2500	1750 – 2500
Electrical System			
Battery/installation	Ah/–	90 / luggage comp.	90 / luggage comp.
Alternator	A/W	150 / 2100	150 / 2100
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW 120d xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.1
Tyres, front/rear		205/55 R16 91V	205/55 R16 91V
Rims, front/rear		7J x 16 steel	7J x 16 steel

			BMW 120d 3-door	BMW 120d xDrive 3-door
Transmission				
Type of transmission			6-speed manual (optional: 8-speed Steptronic transmission)	8-speed Steptronic transmission
Gear ratios	I	:1	4.110 (5.000)	5.000
	II	:1	2.248 (3.200)	3.200
	III	:1	1.403 (2.143)	2.143
	IV	:1	1.000 (1.720)	1.720
	V	:1	0.802 (1.314)	1.314
	VI	:1	0.659 (1.000)	1.000
	VII	:1	– (0.822)	0.822
	VIII	:1	– (0.640)	0.640
	R	:1	3.727 (3.456)	3.456
Final drive		:1	3.077 (2.647)	2.647
Performance				
Power-to-weight ratio		kg/kW	9.8 (9.9)	10.4
Output per litre		kW/ltr	70.2	70.2
Acceleration	0–100 km/h	s	7.1 (7.0)	6.8
in 5th gear	80–120 km/h	s	7.2 (–)	–
Top speed		km/h	228 (228)	222
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW 120d xDrive), tyres with reduced roll resistance		
Fuel Consumption EU ³⁾				
With standard tyres				
Urban		ltr/100 km	5.0 (4.6)	5.1
Extra-urban		ltr/100 km	3.6 (3.5)	3.9
Combined		ltr/100 km	4.1 (3.9)	4.3
CO ₂		g/km	108 (103)	113
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban		ltr/100 km	5.3 (4.9)	5.3
Extra-urban		ltr/100 km	3.7 (3.7)	4.1
Combined		ltr/100 km	4.3 (4.1)	4.5
CO ₂		g/km	114 (109)	119
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban		ltr/100 km	5.5 (5.1)	5.5
Extra-urban		ltr/100 km	3.9 (3.9)	4.3
Combined		ltr/100 km	4.5 (4.3)	4.7
CO ₂		g/km	118 (114)	124
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
 BMW 120d: figures in brackets apply to automatic transmission (standard in the BMW 120d xDrive)

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 125d 3-door.

BMW 125d 3-door		
Body		
No. of doors/seats		3 / 4 (5)
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1521 / 1556
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	5.0
Weight, unladen, to DIN/EU	kg	1425 / 1500
Max. load to DIN	kg	565
Max. permissible weight	kg	1990
Max. axle load, front/rear	kg	940 / 1090
Max. trailer load, braked (12%)/unbraked	Kg	1500 / 740
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.31 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 4 / 4
Engine technology	BMW TwinPower Turbo technology: multi-stage charging, high-pressure and variable-geometry turbocharger, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,500 bar	
Effective capacity	cm ³	1995
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	165 / 224
at	rpm	4400
Max torque	Nm	450
at	rpm	1500 – 3000
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	150 / 2100
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/50 R17 89Y	
Rims, front/rear	7J x 17 light-alloy	

BMW 125d 3-door**Transmission**

Type of transmission	8-speed Steptronic transmission		
Gear ratios	I	:1	5.000
	II	:1	3.200
	III	:1	2.143
	IV	:1	1.720
	V	:1	1.314
	VI	:1	1.000
	VII	:1	0.822
	VIII	:1	0.640
	R	:1	3.456
Final drive		:1	2.647

Performance

Power-to-weight ratio	kg/kW	8.6
Output per litre	kW/ltr	82.7
Acceleration 0–100 km/h	s	6.3
in 5th gear 80–120 km/h	s	–
Top speed	km/h	240

BMW EfficientDynamics

BMW EfficientDynamics
standard features

Brake Energy Regeneration with recuperation display,
Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift
Indicator, ECO PRO mode with coasting function, intelligent lightweight
construction, optimised aerodynamic attributes, on-demand operation of
ancillary units, map-controlled oil pump, detachable a/c compressor, final
drive with optimised warm-up behaviour, tyres with reduced roll resistance

Fuel Consumption EU ³⁾

With standard tyres		
Urban	ltr/100 km	5.1
Extra-urban	ltr/100 km	3.9
Combined	ltr/100 km	4.3
CO ₂	g/km	114
With rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear, with rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear		
Urban	ltr/100 km	5.4
Extra-urban	ltr/100 km	4.1
Combined	ltr/100 km	4.6
CO ₂	g/km	121
Emission rating		EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 116i 5-door.

BMW 116i 5-door		
Body		
No. of doors/seats		5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1535 / 1569
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.7
Engine oil ²⁾	ltr	4.25
Weight, unladen, to DIN/EU	kg	1305 / 1380
Max. load to DIN	kg	565
Max. permissible weight	kg	1870
Max. axle load, front/rear	kg	850 / 1090
Max. trailer load, braked (12%)/unbraked	kg	1200 / 650
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.31 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1499
Stroke/bore	mm	94.6 / 82.0
Compression ratio	:1	11.0
Fuel		min RON 91
Max. output	kW/hp	80 / 109
at	rpm	4500 – 6000
Max torque	Nm	180
at	rpm	1250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear		195/55 R16 87H
Rims, front/rear		6.5J x 16 steel

BMW 116i 5-door			
Transmission			
Type of transmission		6-speed manual	
Gear ratios	I	:1	4.552
	II	:1	2.548
	III	:1	1.659
	IV	:1	1.230
	V	:1	1.000
	VI	:1	0.830
	R	:1	4.138
Final drive		:1	2.813
Performance			
Power-to-weight ratio		kg/kW	16.3
Output per litre		kW/ltr	53.4
Acceleration	0–100 km/h	s	10.9
in 5th gear	80–120 km/h	s	14.8
Top speed		km/h	195
BMW EfficientDynamics			
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, tyres with reduced roll resistance	
Fuel Consumption EU ³⁾			
With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres			
Urban	ltr/100 km		6.3
Extra-urban	ltr/100 km		4.2
Combined	ltr/100 km		5.0
CO ₂	g/km		116
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear			
Urban	ltr/100 km		6.7
Extra-urban	ltr/100 km		4.5
Combined	ltr/100 km		5.3
CO ₂	g/km		123
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear			
Urban	ltr/100 km		6.8
Extra-urban	ltr/100 km		4.6
Combined	ltr/100 km		5.4
CO ₂	g/km		126
Emission rating		EU6	

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 118i 5-door, BMW 120i 5-door.

		BMW 118i 5-door	BMW 120i 5-door
Body			
No. of doors/seats		5 / 5	5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1535 / 1569	1535 / 1569
Ground clearance	mm	140	140
Turning circle	m	10.9	10.9
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	6.4 (7.0)	6.4 (7.0)
Engine oil ²⁾	ltr	4.2	4.2
Weight, unladen, to DIN/EU	kg	1300 / 1375 (1320 / 1395)	1305 / 1380 (1320 / 1395)
Max. load to DIN	kg	565	565
Max. permissible weight	kg	1865 (1885)	1870 (1885)
Max. axle load, front/rear	kg	865 / 1090	870 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1200 / 650	1200 / 670
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.31 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1598	1598
Stroke/bore	mm	85.8 / 77.0	85.8 / 77.0
Compression ratio	:1	10.5	10.5
Fuel		min RON 91	min RON 91
Max. output	kW/hp	100 / 136	130 / 177
at	rpm	4400 – 6450	4800 – 6450
Max torque	Nm	220	250
at	rpm	1350 – 4300	1500 – 4500
Electrical System			
Battery/installation	Ah/–	80 / luggage comp.	80 / luggage comp.
Alternator	A/W	170 / 2380	170 / 2380
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.0
Tyres, front/rear		195/55 R16 87H	195/55 R16 87W
Rims, front/rear		6.5J x 16 steel	6.5J x 16 steel

			BMW 118i 5-door	BMW 120i 5-door
Transmission				
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)		
Gear ratios	I	:1	4.552 (4.714)	4.552 (4.714)
	II	:1	2.548 (3.143)	2.548 (3.143)
	III	:1	1.659 (2.106)	1.659 (2.106)
	IV	:1	1.230 (1.667)	1.230 (1.667)
	V	:1	1.000 (1.285)	1.000 (1.285)
	VI	:1	0.830 (1.000)	0.830 (1.000)
	VII	:1	– (0.839)	– (0.839)
	VIII	:1	– (0.667)	– (0.667)
	R	:1	4.138 (3.295)	4.138 (3.295)
Final drive		:1	2.813 (3.077)	3.077 (3.077)
Performance				
Power-to-weight ratio	kg/kW		13.0 (13.2)	10.0 (10.2)
Output per litre	kW/ltr		62.6	81.4
Acceleration	0–100 km/h	s	8.5 (8.7)	7.4 (7.2)
in 5th gear	80–120 km/h	s	10.6 (–)	8.8 (–)
Top speed	km/h		210 (210)	225 (222)
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, tyres with reduced roll resistance		
Fuel Consumption EU ³⁾				
With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres				
Urban	ltr/100 km		7.0 (7.2)	7.4 (7.1)
Extra-urban	ltr/100 km		4.5 (4.6)	4.7 (4.6)
Combined	ltr/100 km		5.4 (5.6)	5.7 (5.6)
CO ₂	g/km		125 (129)	132 (129)
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban	ltr/100 km		7.2 (7.4)	7.6 (7.4)
Extra-urban	ltr/100 km		4.6 (4.8)	4.8 (4.8)
Combined	ltr/100 km		5.6 (5.7)	5.8 (5.7)
CO ₂	g/km		129 (133)	136 (133)
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban	ltr/100 km		7.4 (7.6)	7.8 (7.6)
Extra-urban	ltr/100 km		4.7 (4.9)	4.9 (4.9)
Combined	ltr/100 km		5.7 (5.9)	6.0 (5.9)
CO ₂	g/km		133 (137)	139 (137)
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 125i 5-door.

BMW 125i 5-door		
Body		
No. of doors/seats		5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1521 / 1556
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0 (7.6)
Engine oil ²⁾	ltr	5.0
Weight, unladen, to DIN/EU	kg	1355 / 1430 (1375 / 1450)
Max. load to DIN	kg	565
Max. permissible weight	kg	1920 (1940)
Max. axle load, front/rear	kg	895 / 1120
Max. trailer load, braked (12%/unbraked)	kg	1200 / 680
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.32 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 4 / 4
Engine technology	BMW TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	1997
Stroke/bore	mm	90.1 / 84.0
Compression ratio	:1	10.0
Fuel		min RON 91
Max. output	kW/hp	160 / 218
at	rpm	5000
Max torque	Nm	310
at	rpm	1350 – 4800
Electrical System		
Battery/installation	Ah/–	80 / luggage comp.
Alternator	AW	170 / 2380
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/50 R17 89Y	
Rims, front/rear	7J x 17 light-alloy	

BMW 125i 5-door			
Transmission			
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)	
Gear ratios	I	:1	3.683 (4.714)
	II	:1	2.062 (3.143)
	III	:1	1.313 (2.106)
	IV	:1	1.000 (1.667)
	V	:1	0.809 (1.285)
	VI	:1	0.677 (1.000)
	VII	:1	– (0.839)
	VIII	:1	– (0.667)
	R	:1	3.348 (3.295)
Final drive		:1	3.909 (3.077)
Performance			
Power-to-weight ratio		kg/kW	8.5 (8.6)
Output per litre		kW/ltr	80.1
Acceleration	0–100 km/h	s	6.4 (6.2)
	in 5th gear 80–120 km/h	s	7.5
Top speed		km/h	245 (243)
BMW EfficientDynamics			
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, tyres with reduced roll resistance	
Fuel Consumption EU ³⁾			
With standard tyres			
Urban		ltr/100 km	8.6 (8.5)
Extra-urban		ltr/100 km	5.4 (5.1)
Combined		ltr/100 km	6.6 (6.3)
CO ₂		g/km	154 (148)
With rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear, with rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear			
Urban		ltr/100 km	8.9 (8.7)
Extra-urban		ltr/100 km	5.4 (5.2)
Combined		ltr/100 km	6.7 (6.5)
CO ₂		g/km	157 (151)
Emission rating			EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW M135i 5-door, BMW M135i xDrive 5-door.

		BMW M135i 5-door	BMW M135i xDrive 5-door
Body			
No. of doors/seats		5 / 5	5 / 5
Length/width/height ¹⁾ (unladen)	mm	4324 / 1765 / 1411	4324 / 1765 / 1411
Wheelbase	mm	2690	2690
Track, front/rear	mm	1516 / 1534	1516 / 1534
Ground clearance	mm	130	130
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	6.9 (7.1)	7.1
Engine oil ²⁾	ltr	6.5	6.5
Weight, unladen, to DIN/EU	kg	1430 / 1505 (1450 / 1525)	1520 / 1595
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1995 (2015)	2070
Max. axle load, front/rear	kg	955 / 1120	1010 / 1120
Max. trailer load, braked (12%/unbraked)	kg	– / –	– / –
Max. roof load/max towbar download	kg	75 / –	75 / –
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.34 x 2.14	0.35 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 6 / 4	in-line / 6 / 4
Engine technology		M Performance TwinPower Turbo technology: twin-scroll turbocharger, High Precision Direct Injection, fully variable valve control (VALVETRONIC), Double-VANOS variable camshaft control	
Effective capacity	cm ³	2979	2979
Stroke/bore	mm	89.6 / 84.0	89.6 / 84.0
Compression ratio	:1	10.2	10.2
Fuel		min RON 91	min RON 91
Max. output	kW/hp	240 / 326	240 / 326
at	rpm	5800 – 6000	5800 – 6000
Max torque	Nm	450	450
at	rpm	1300 – 4500	1300 – 4500
Electrical System			
Battery/installation	Ah/–	80 / luggage comp.	80 / luggage comp.
Alternator	A/W	170 / 2380	170 / 2380
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle with M-specific elastokinematics	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Four-piston fixed-calliper disc brakes	
Brakes, rear		Twin-piston fixed-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW M135i xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), variable sport steering incl. Servotronic function	
Steering ratio, overall	:1	14.5	14.6
Tyres, front/rear		225/40 ZR18 88Y/ 245/35 ZR18 92Y XL	225/40 ZR18 88Y/ 245/35 ZR18 92Y XL
Rims front/rear		7.5J x 18 light-alloy/ 8J x 18 light-alloy	7.5J x 18 light-alloy/ 8J x 18 light-alloy

BMW M135i 5-door			BMW M135i xDrive 5-door	
Transmission				
Type of transmission			6-speed manual (optional: 8-speed Steptronic sport transmission)	8-speed Steptronic sport transmission
Gear ratios	I	:1	4.110 (4.714)	4.714
	II	:1	2.315 (3.143)	3.143
	III	:1	1.542 (2.106)	2.106
	IV	:1	1.179 (1.667)	1.667
	V	:1	1.000 (1.285)	1.285
	VI	:1	0.846 (1.000)	1.000
	VII	:1	– (0.839)	0.839
	VIII	:1	– (0.667)	0.667
	R	:1	3.727 (3.295)	3.295
Final drive		:1	3.077 (3.077)	3.077
Performance				
Power-to-weight ratio		kg/kW	6.0 (6.0)	6.3
Output per litre		kW/ltr	80.6	80.6
Acceleration	0–100 km/h	s	5.1 (4.9)	4.7
in 5th gear	80–120 km/h	s	5.0 (–)	–
Top speed		km/h	250 (250)	250
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW M135i xDrive), tyres with reduced roll resistance		
Fuel Consumption EU				
Urban	ltr/100 km		10.9 (10.3)	10.8
Extra-urban	ltr/100 km		6.4 (5.9)	6.1
Combined	ltr/100 km		8.0 (7.5)	7.8
CO ₂	g/km		188 (175)	182
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
 BMW M135i: figures in brackets apply to automatic transmission (standard in the BMW M135i xDrive)

¹⁾ Height with roof fin: 1430 mm

²⁾ Oil change

BMW 116d 5-door.

BMW 116d 5-door		
Body		
No. of doors/seats		5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1535 / 1569
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	4.4
Weight, unladen, to DIN/EU	kg	1320 / 1395 (1350 / 1425)
Max. load to DIN	kg	565
Max. permissible weight	kg	1885 (1915)
Max. axle load, front/rear	kg	885 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 690
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.30 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1496
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	85 / 116
at	rpm	4000
Max torque	Nm	270
at	rpm	1750 – 2250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear		195/55 R16 87H
Rims, front/rear		6.5J x 16 steel

BMW 116d 5-door**Transmission**

Type of transmission	6-speed manual (optional: 8-speed Steptronic transmission)		
Gear ratios	I	:1	4.002 (5.000)
	II	:1	2.130 (3.200)
	III	:1	1.396 (2.143)
	IV	:1	1.000 (1.720)
	V	:1	0.781 (1.314)
	VI	:1	0.668 (1.000)
	VII	:1	– (0.822)
	VIII	:1	– (0.640)
	R	:1	3.647 (3.456)
Final drive		:1	3.077 (2.647)

Performance

Power-to-weight ratio	kg/kW	15.5 (15.9)
Output per litre	kW/ltr	56.8
Acceleration 0–100 km/h	s	10.3 (10.3)
in 5th gear 80–120 km/h	s	11.7
Top speed	km/h	200 (200)

BMW EfficientDynamics

BMW EfficientDynamics
standard features

Brake Energy Regeneration with recuperation display,
Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift
Indicator, ECO PRO mode with coasting function (automatic), intelligent
lightweight construction, optimised aerodynamic attributes, on-demand
operation of ancillary units, map-controlled oil pump, detachable a/c
compressor, final drive with optimised warm-up behaviour, tyres with
reduced roll resistance

Fuel Consumption EU ³⁾

With standard tyres, rims 7J x 16 and tyres 205/55 R16 as well as winter tyres

Urban	ltr/100 km	4.3 (4.1)
Extra-urban	ltr/100 km	3.3 (3.4)
Combined	ltr/100 km	3.7 (3.6)
CO ₂	g/km	97 (96)

With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17,
with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear

Urban	ltr/100 km	4.7 (4.4)
Extra-urban	ltr/100 km	3.6 (3.6)
Combined	ltr/100 km	4.0 (3.9)
CO ₂	g/km	104 (103)

With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear

Urban	ltr/100 km	4.8 (4.6)
Extra-urban	ltr/100 km	3.7 (3.8)
Combined	ltr/100 km	4.1 (4.1)
CO ₂	g/km	107 (107)

Emission rating EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
Figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 116d EfficientDynamics Edition 5-door.

BMW 116d EfficientDynamics Edition 5-door		
Body		
No. of doors/seats		5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1413
Wheelbase	mm	2690
Track, front/rear	mm	1523 / 1558
Ground clearance	mm	132
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	4.4
Weight, unladen, to DIN/EU	kg	1320 / 1395
Max. load to DIN	kg	565
Max. permissible weight	kg	1885
Max. axle load, front/rear	kg	855 / 1090
Max. trailer load, braked (12%)/unbraked	kg	– / –
Max. roof load/max towbar download	kg	75 / –
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.29 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 3 / 4
Engine technology	BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1496
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	85 / 116
at	rpm	4000
Max torque	Nm	270
at	rpm	1750 – 2250
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	180 / 2520
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/55 R16 91V	
Rims, front/rear	7J x 16 steel	

BMW 116d EfficientDynamics Edition 5-door**Transmission**

Type of transmission	6-speed manual	
Gear ratios	I	:1
	II	:1
	III	:1
	IV	:1
	V	:1
	VI	:1
	R	:1
Final drive		:1

Performance

Power-to-weight ratio	kg/kW	15.5
Output per litre	kW/ltr	56.8
Acceleration	0–100 km/h	s
in 5th gear	80–120 km/h	s
Top speed	km/h	195

BMW EfficientDynamics

BMW EfficientDynamics standard features	Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode, intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, tyres with reduced roll resistance
---	---

Fuel Consumption EU ³⁾

With standard tyres		
Urban	ltr/100 km	3.9
Extra-urban	ltr/100 km	3.1
Combined	ltr/100 km	3.4
CO ₂	g/km	89
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear as well as winter tyres		
Urban	ltr/100 km	4.3
Extra-urban	ltr/100 km	3.4
Combined	ltr/100 km	3.7
CO ₂	g/km	98
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear		
Urban	ltr/100 km	4.4
Extra-urban	ltr/100 km	3.5
Combined	ltr/100 km	3.8
CO ₂	g/km	101
Emission rating		EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1432 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 118d 5-door, BMW 118d xDrive 5-door.

		BMW 118d 5-door	BMW 118d xDrive 5-door
Body			
No. of doors/seats		5 / 5	5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1535 / 1569	1522 / 1556
Ground clearance	mm	140	140
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	7.0	7.0
Engine oil ²⁾	ltr	5.0	5.0
Weight, unladen, to DIN/EU	kg	1350 / 1425 (1375 / 1450)	1425 / 1500
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1915 (1940)	1975
Max. axle load, front/rear	kg	900 / 1090	940 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 690	1500 / 710
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.30 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1995	1995
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0
Compression ratio	:1	16.5	16.5
Fuel		diesel	diesel
Max. output	kW/hp	110 / 150	110 / 150
at	rpm	4000	4000
Max torque	Nm	320	320
at	rpm	1500 – 3000	1500 – 3000
Electrical System			
Battery/installation	Ah/–	90 / luggage comp.	90 / luggage comp.
Alternator	A/W	150 / 2100	150 / 2100
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW 118d xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.1
Tyres, front/rear		195/55 R16 87W	205/55 R16 91V
Rims, front/rear		6.5J x 16 steel	7J x 16 steel

			BMW 118d 5-door	BMW 118d xDrive 5-door
Transmission				
Type of transmission		6-speed manual (optional: 8-speed Steptronic transmission)		6-speed manual
Gear ratios	I	:1	4.002 (5.000)	4.110
	II	:1	2.130 (3.200)	2.248
	III	:1	1.396 (2.143)	1.403
	IV	:1	1.000 (1.720)	1.000
	V	:1	0.781 (1.314)	0.802
	VI	:1	0.668 (1.000)	0.659
	VII	:1	– (0.822)	–
	VIII	:1	– (0.640)	–
	R	:1	3.647 (3.456)	3.727
Final drive		:1	3.077 (2.647)	3.154
Performance				
Power-to-weight ratio		kg/kW	12.3 (12.5)	13.0
Output per litre		kW/ltr	55.1	55.1
Acceleration	0–100 km/h	s	8.3 (8.1)	8.4
in 5th gear	80–120 km/h	s	9.2 (–)	9.5
Top speed		km/h	212 (212)	210
BMW EfficientDynamics				
BMW EfficientDynamics standard features		Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW 118d xDrive), tyres with reduced roll resistance		
Fuel Consumption EU ³⁾				
With standard tyres				
Urban		ltr/100 km	5.0 (4.7)	5.1
Extra-urban		ltr/100 km	3.6 (3.6)	3.8
Combined		ltr/100 km	4.1 (4.0)	4.3
CO ₂		g/km	109 (105)	113
With rims 7J x 16 and tyres 205/55 R16 (BMW 118d), with rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban		ltr/100 km	4.8 (4.5)	5.4
Extra-urban		ltr/100 km	3.5 (3.4)	4.0
Combined		ltr/100 km	4.0 (3.8)	4.5
CO ₂		g/km	104 (99)	119
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban		ltr/100 km	5.2 (4.9)	5.6
Extra-urban		ltr/100 km	3.8 (3.8)	4.1
Combined		ltr/100 km	4.3 (4.2)	4.7
CO ₂		g/km	114 (110)	123
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
BMW 118d: figures in brackets apply to automatic transmission

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 120d 5-door, BMW 120d xDrive 5-door.

		BMW 120d 5-door	BMW 120d xDrive 5-door
Body			
No. of doors/seats		5 / 5	5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421	4329 / 1765 / 1421
Wheelbase	mm	2690	2690
Track, front/rear	mm	1521 / 1556	1522 / 1556
Ground clearance	mm	140	140
Turning circle	m	10.9	11.3
Fuel tank capacity	approx. ltr	52	52
Cooling system incl. heater	ltr	7.0	7.0
Engine oil ²⁾	ltr	5.0	5.0
Weight, unladen, to DIN/EU	kg	1375 / 1450 (1390 / 1465)	1455 / 1530
Max. load to DIN	kg	565	550
Max. permissible weight	kg	1940 (1955)	2005
Max. axle load, front/rear	kg	900 / 1090	975 / 1090
Max. trailer load, braked (12%/unbraked)	kg	1500 / 710	1500 / 750
Max. roof load/max towbar download	kg	75 / 75	75 / 75
Luggage comp. capacity	ltr	360 – 1200	360 – 1200
Air resistance	C _d x A	0.30 x 2.14	0.31 x 2.14
Power Unit			
Config./No. of cyls./valves		in-line / 4 / 4	in-line / 4 / 4
Engine technology		BMW TwinPower Turbo technology: turbocharger with variable inlet geometry, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,000 bar	
Effective capacity	cm ³	1995	1995
Stroke/bore	mm	90.0 / 84.0	90.0 / 84.0
Compression ratio	:1	16.5	16.5
Fuel		diesel	diesel
Max. output	kW/hp	140 / 190	140 / 190
at	rpm	4000	4000
Max torque	Nm	400	400
at	rpm	1750 – 2500	1750 – 2500
Electrical System			
Battery/installation	Ah/–	90 / luggage comp.	90 / luggage comp.
Alternator	A/W	150 / 2100	150 / 2100
Driving Dynamics and Safety			
Suspension, front		Aluminium double-joint spring strut axle	
Suspension, rear		Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front		Single-piston floating-calliper disc brakes	
Brakes, rear		Single-piston floating-calliper disc brakes	
Driving stability systems		Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant; BMW 120d xDrive: linked to xDrive all-wheel-drive system in Integrated Chassis Management (ICM)	
Safety equipment		Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering		Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0	15.1
Tyres, front/rear		205/55 R16 91V	205/55 R16 91V
Rims, front/rear		7J x 16 steel	7J x 16 steel

			BMW 120d 5-door	BMW 120d xDrive 5-door
Transmission				
Type of transmission			6-speed manual (optional: 8-speed Steptronic transmission)	8-speed Steptronic transmission
Gear ratios	I	:1	4.110 (5.000)	5.000
	II	:1	2.248 (3.200)	3.200
	III	:1	1.403 (2.143)	2.143
	IV	:1	1.000 (1.720)	1.720
	V	:1	0.802 (1.314)	1.314
	VI	:1	0.659 (1.000)	1.000
	VII	:1	– (0.822)	0.822
	VIII	:1	– (0.640)	0.640
	R	:1	3.727 (3.456)	3.456
Final drive		:1	3.077 (2.647)	2.647
Performance				
Power-to-weight ratio		kg/kW	9.8 (9.9)	10.4
Output per litre		kW/ltr	70.2	70.2
Acceleration	0–100 km/h	s	7.1 (7.0)	6.8
in 5th gear	80–120 km/h	s	7.2 (–)	–
Top speed		km/h	228 (228)	222
BMW EfficientDynamics				
BMW EfficientDynamics standard features			Brake Energy Regeneration with recuperation display, Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift Indicator, ECO PRO mode with coasting function (automatic), intelligent lightweight construction, optimised aerodynamic attributes, on-demand operation of ancillary units, map-controlled oil pump, detachable a/c compressor, final drive with optimised warm-up behaviour, efficiency- and weight-optimised transfer case (BMW 120d xDrive), tyres with reduced roll resistance	
Fuel Consumption EU ³⁾				
With standard tyres				
Urban		ltr/100 km	5.0 (4.6)	5.1
Extra-urban		ltr/100 km	3.6 (3.5)	3.9
Combined		ltr/100 km	4.1 (3.9)	4.3
CO ₂		g/km	108 (103)	113
With rims 7J x 17 and tyres 205/50 R17, with rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear				
Urban		ltr/100 km	5.3 (4.9)	5.3
Extra-urban		ltr/100 km	3.7 (3.7)	4.1
Combined		ltr/100 km	4.3 (4.1)	4.5
CO ₂		g/km	114 (109)	119
With rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear				
Urban		ltr/100 km	5.5 (5.1)	5.5
Extra-urban		ltr/100 km	3.9 (3.9)	4.3
Combined		ltr/100 km	4.5 (4.3)	4.7
CO ₂		g/km	118 (114)	124
Emission rating			EU6	EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)
 BMW 120d: figures in brackets apply to automatic transmission (standard in the BMW 120d xDrive)

¹⁾ Height with roof fin: 1440 mm

²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format

BMW 125d 5-door.

BMW 125d 5-door		
Body		
No. of doors/seats		5 / 5
Length/width/height ¹⁾ (unladen)	mm	4329 / 1765 / 1421
Wheelbase	mm	2690
Track, front/rear	mm	1521 / 1556
Ground clearance	mm	140
Turning circle	m	10.9
Fuel tank capacity	approx. ltr	52
Cooling system incl. heater	ltr	7.0
Engine oil ²⁾	ltr	5.0
Weight, unladen, to DIN/EU	kg	1430 / 1505
Max. load to DIN	kg	565
Max. permissible weight	kg	1995
Max. axle load, front/rear	kg	940 / 1115
Max. trailer load, braked (12%)/unbraked	Kg	1500 / 710
Max. roof load/max towbar download	kg	75 / 75
Luggage comp. capacity	ltr	360 – 1200
Air resistance	C _d x A	0.31 x 2.14
Power Unit		
Config./No. of cyls./valves		in-line / 4 / 4
Engine technology	BMW TwinPower Turbo technology: multi-stage charging, high-pressure and variable-geometry turbocharger, common rail direct injection with solenoid valve injectors, max. injection pressure: 2,500 bar	
Effective capacity	cm ³	1995
Stroke/bore	mm	90.0 / 84.0
Compression ratio	:1	16.5
Fuel		diesel
Max. output	kW/hp	165 / 224
at	rpm	4400
Max torque	Nm	450
at	rpm	1500 – 3000
Electrical System		
Battery/installation	Ah/–	90 / luggage comp.
Alternator	A/W	150 / 2100
Driving Dynamics and Safety		
Suspension, front	Aluminium double-joint spring strut axle	
Suspension, rear	Five-link axle in lightweight steel construction with double elastic bearing	
Brakes, front	Single-piston floating-calliper disc brakes	
Brakes, rear	Single-piston floating-calliper disc brakes	
Driving stability systems	Standard: DSC incl. ABS, ASC and DTC (Dynamic Traction Control), CBC (Cornering Brake Control), DBC (Dynamic Brake Control), Dry Braking function, Fading Compensation, Start-Off Assistant	
Safety equipment	Standard: airbags for driver and front passenger, side airbags for driver and front passenger, head airbags front and rear, three-point inertia-reel seatbelts on all seats with belt tensioner and belt force limiter at the front, crash sensors, Tyre Defect Indicator	
Steering	Electric Power Steering (EPS), optional: Servotronic function, variable sport steering	
Steering ratio, overall	:1	15.0
Tyres, front/rear	205/50 R17 89W	
Rims, front/rear	7J x 17 light-alloy	

BMW 125d 5-door**Transmission**

Type of transmission	8-speed Steptronic transmission		
Gear ratios	I	:1	5.000
	II	:1	3.200
	III	:1	2.143
	IV	:1	1.720
	V	:1	1.314
	VI	:1	1.000
	VII	:1	0.822
	VIII	:1	0.640
	R	:1	3.456
Final drive		:1	2.647

Performance

Power-to-weight ratio	kg/kW	8.7
Output per litre	kW/ltr	82.7
Acceleration 0–100 km/h	s	6.3
in 5th gear 80–120 km/h	s	–
Top speed	km/h	240

BMW EfficientDynamics

BMW EfficientDynamics
standard features

Brake Energy Regeneration with recuperation display,
Electric Power Steering (EPS), Auto Start Stop function, Optimum Gearshift
Indicator, ECO PRO mode with coasting function, intelligent lightweight
construction, optimised aerodynamic attributes, on-demand operation of
ancillary units, map-controlled oil pump, detachable a/c compressor, final
drive with optimised warm-up behaviour, tyres with reduced roll resistance

Fuel Consumption EU ³⁾

With standard tyres		
Urban	ltr/100 km	5.1
Extra-urban	ltr/100 km	3.9
Combined	ltr/100 km	4.3
CO ₂	g/km	114
With rims 7.5J x 17 and tyres 225/45 R 17 as well as winter tyres, with rims 7.5J x 17 front, 8J x 17 rear and tyres 225/45 R17 front, 245/40 R17 rear, with rims 7.5J x 18 front, 8J x 18 rear and tyres 225/40 R18 front, 245/35 R18 rear		
Urban	ltr/100 km	5.4
Extra-urban	ltr/100 km	4.1
Combined	ltr/100 km	4.6
CO ₂	g/km	121
Emission rating		EU6

Specifications apply to ACEA markets/data relevant to homologation apply in part only to Germany (weight)

¹⁾ Height with roof fin: 1440 mm


²⁾ Oil change

³⁾ Fuel consumption and CO₂ emission figures depend on the selected tyre format


8. Output and torque diagrams. BMW 116i.




BMW 118i.

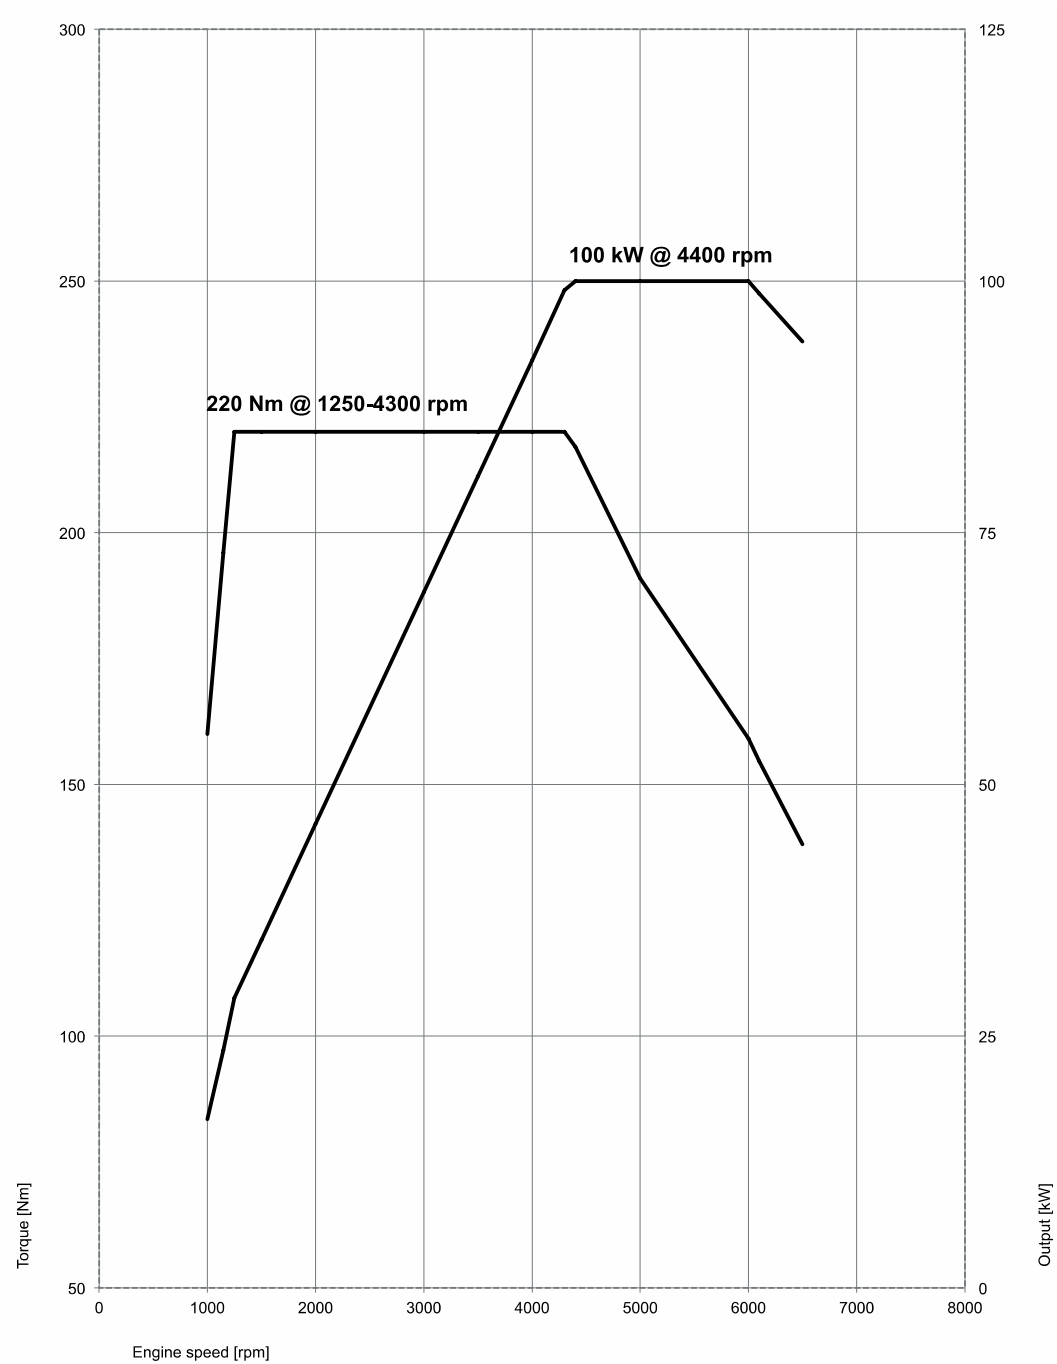


BMW 120i.

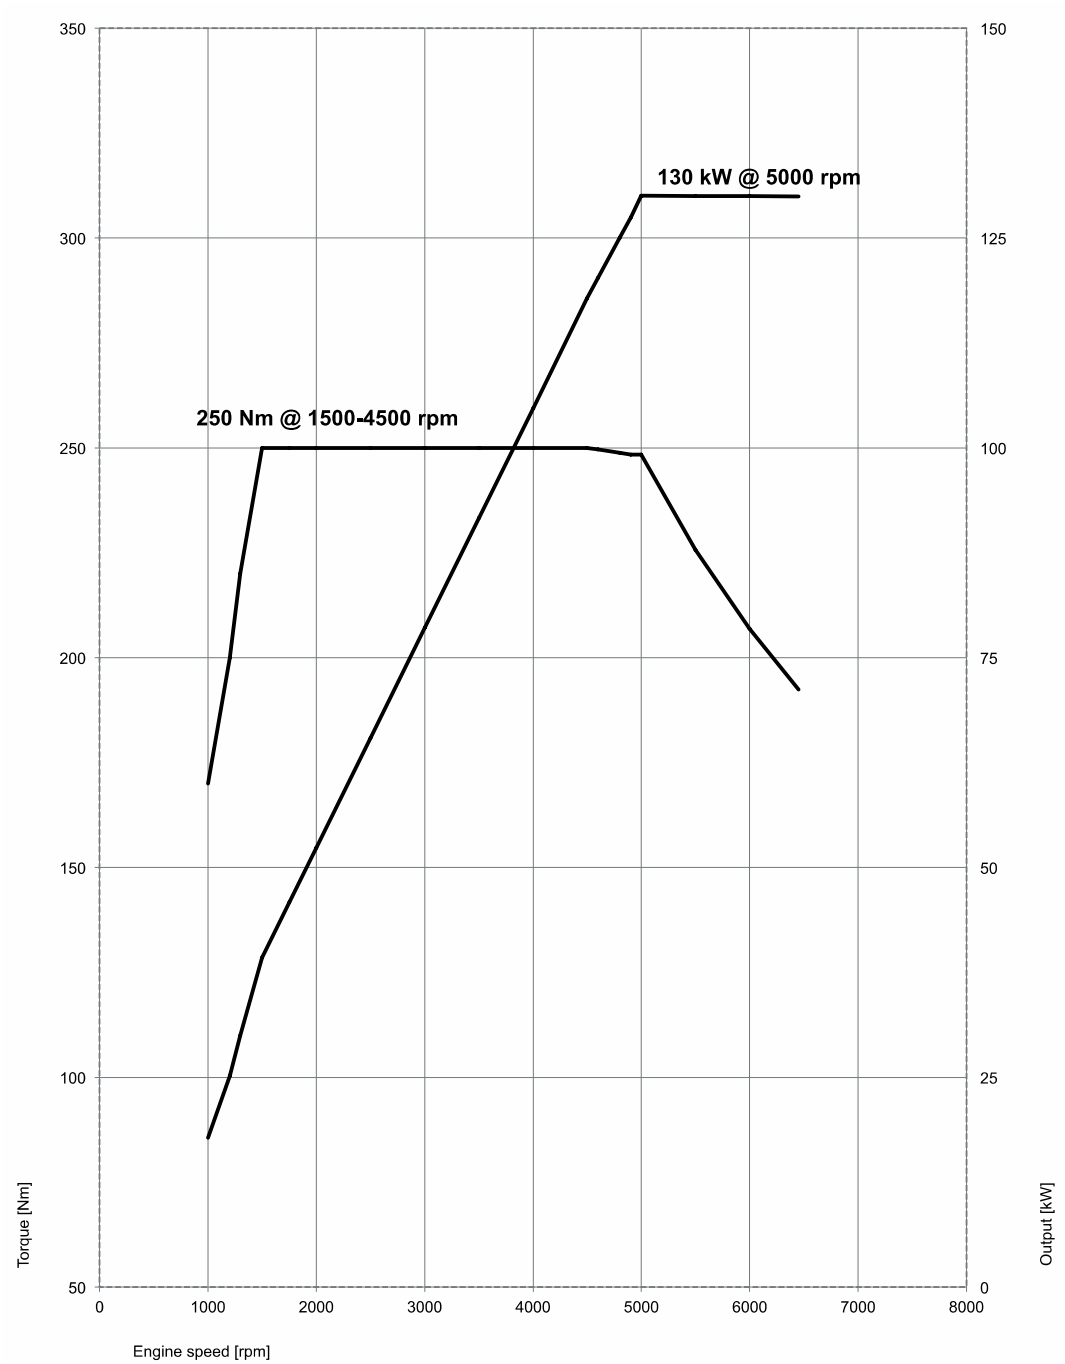

BMW 125i.

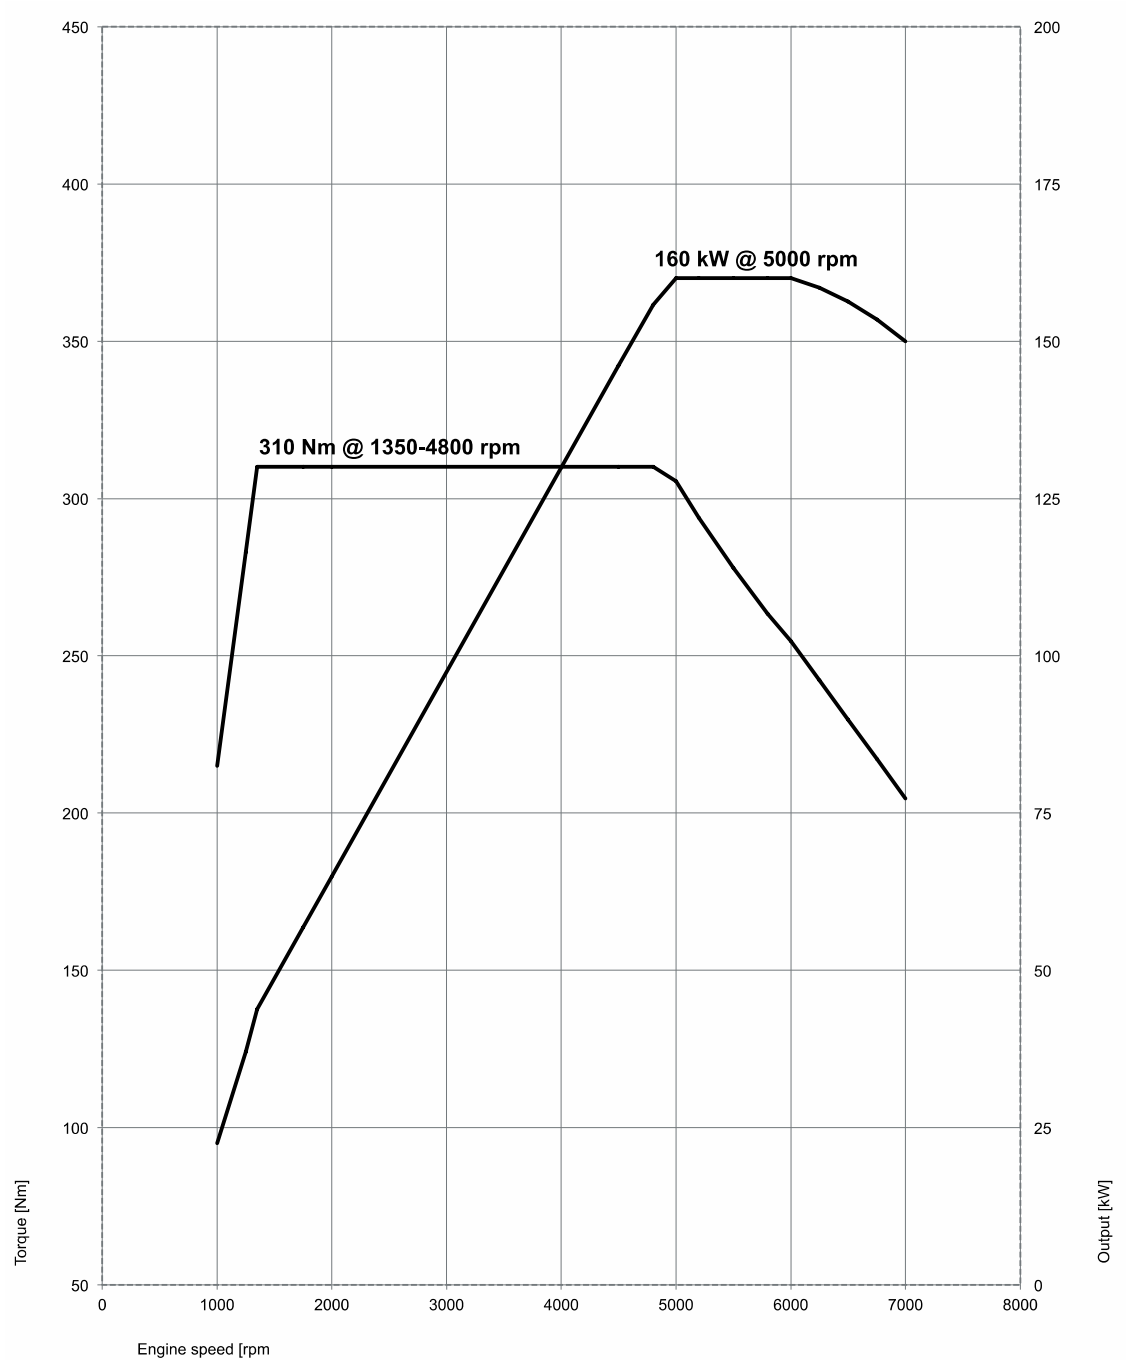


BMW M135i.

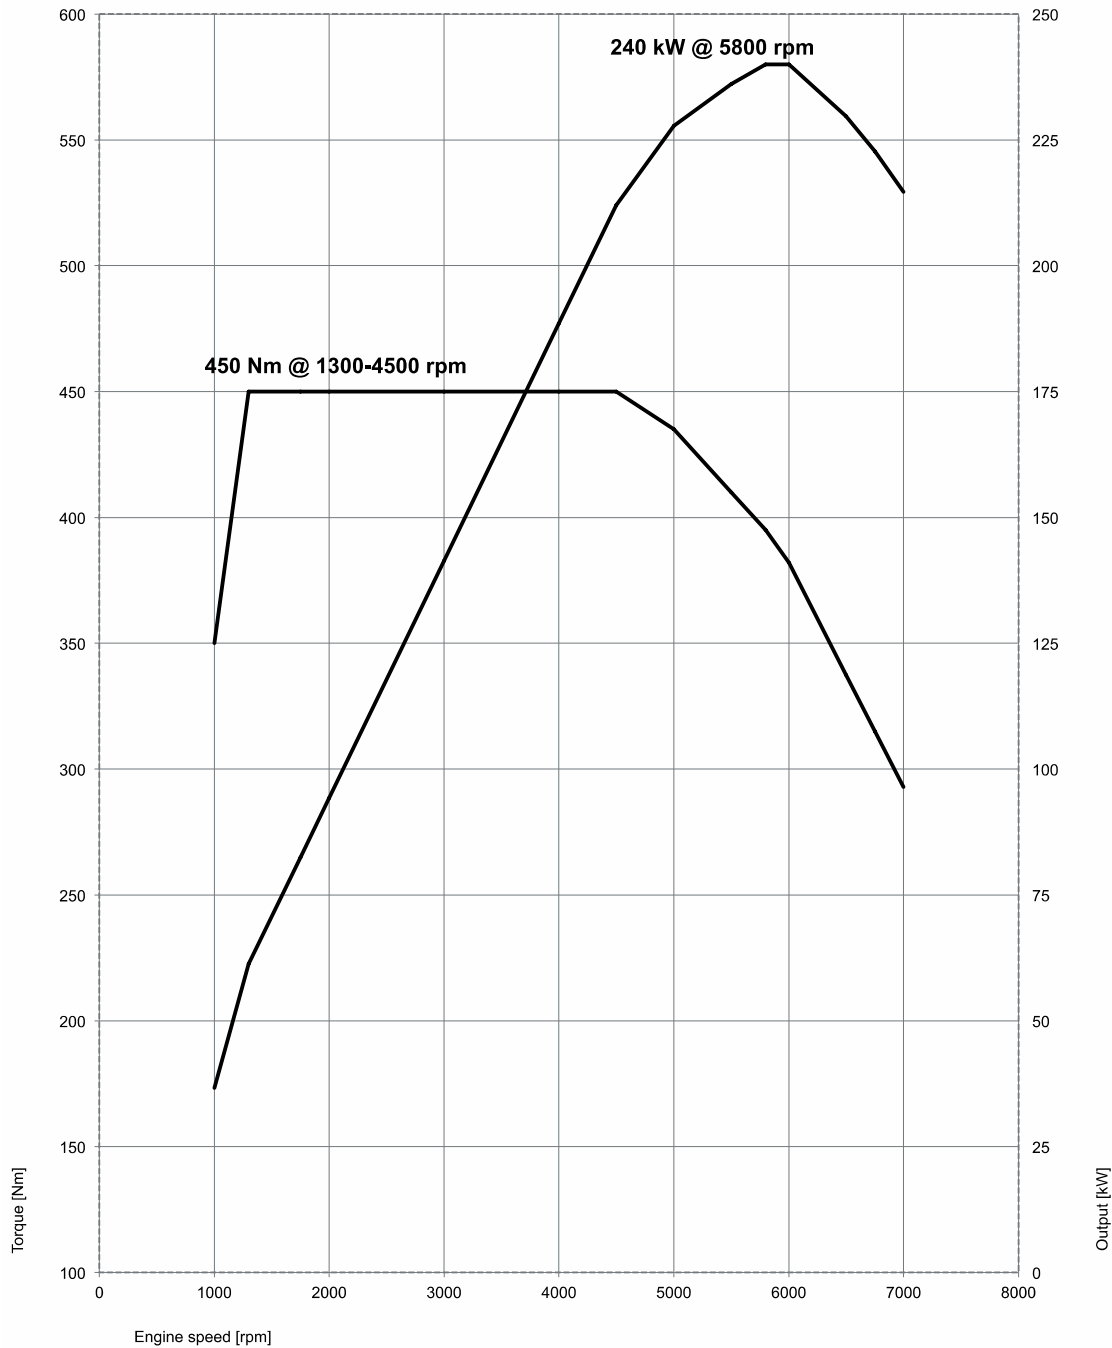


BMW 116d and BMW 116d ED.




BMW 118d.

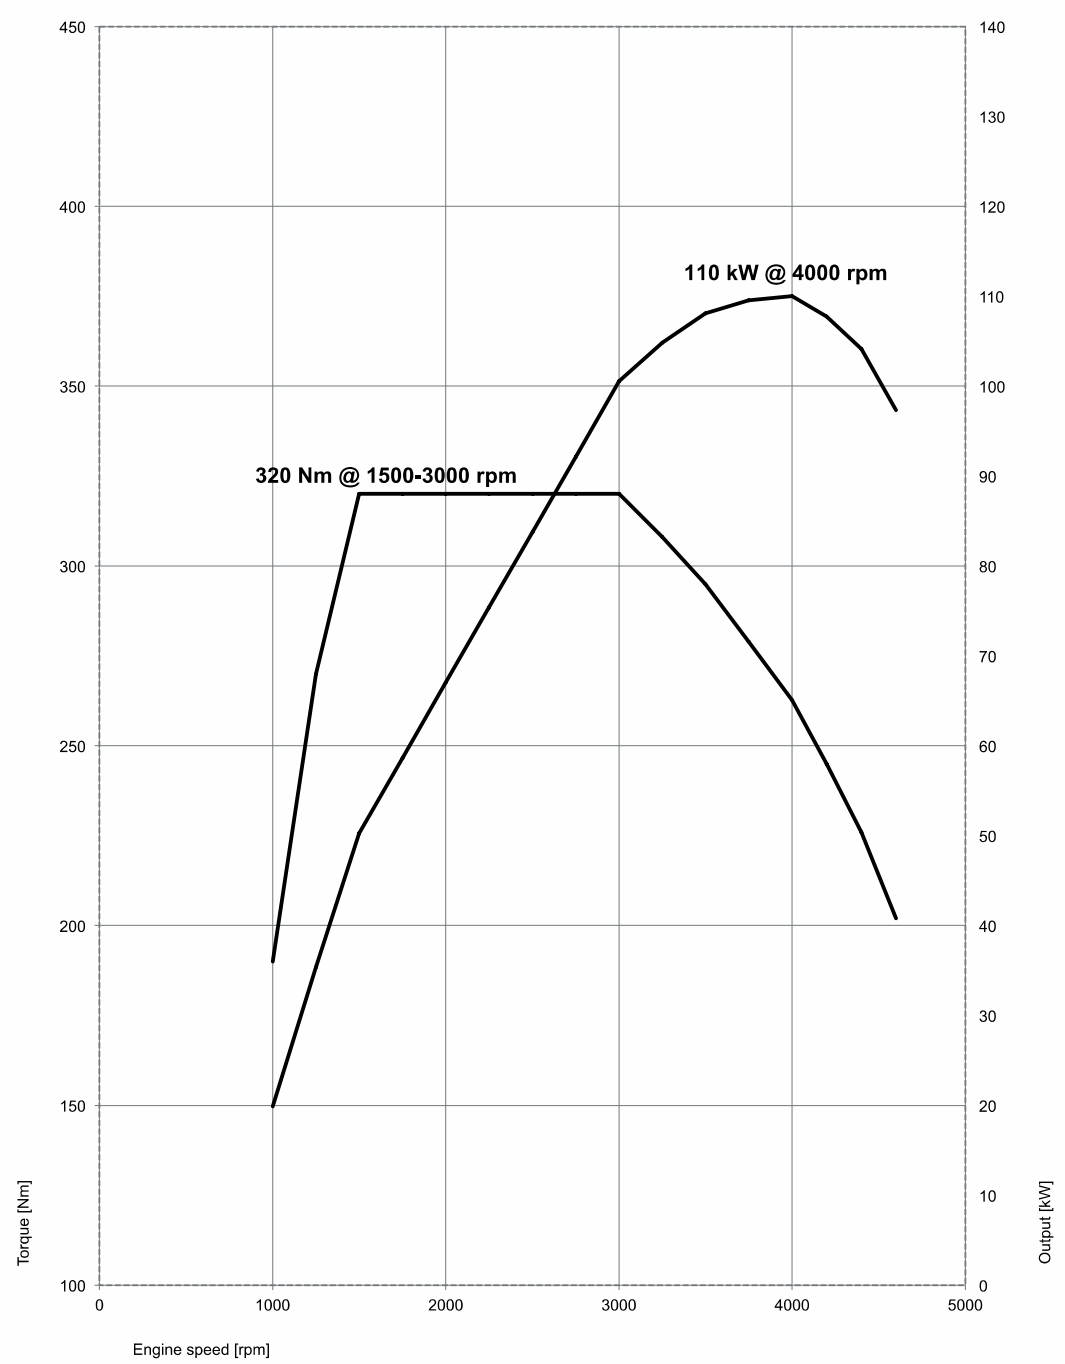


BMW 120d.

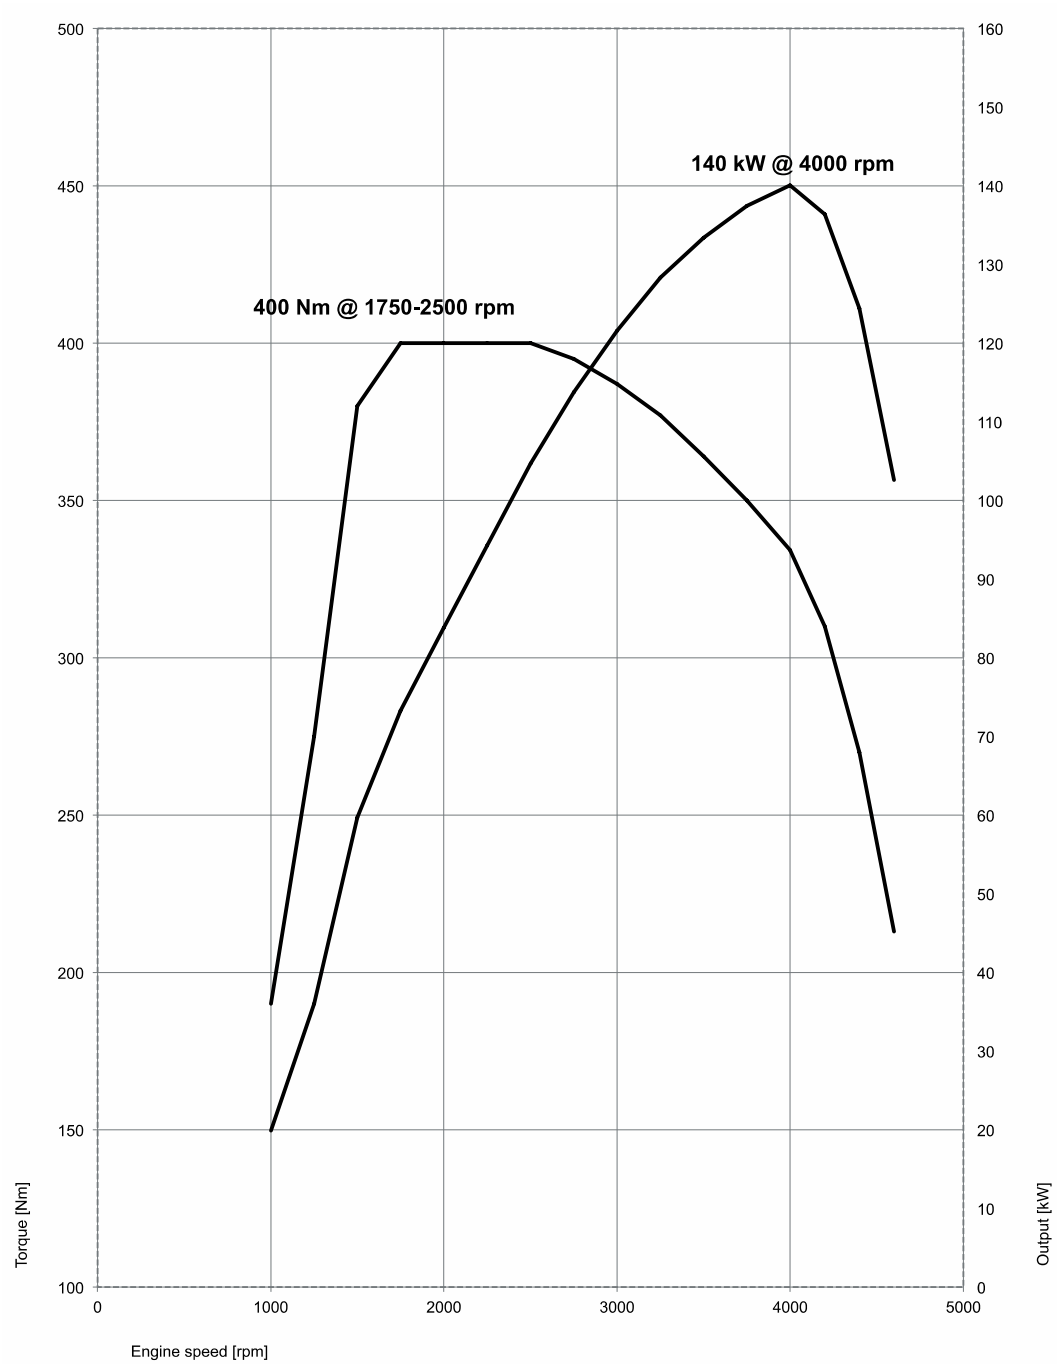

BMW 125d.

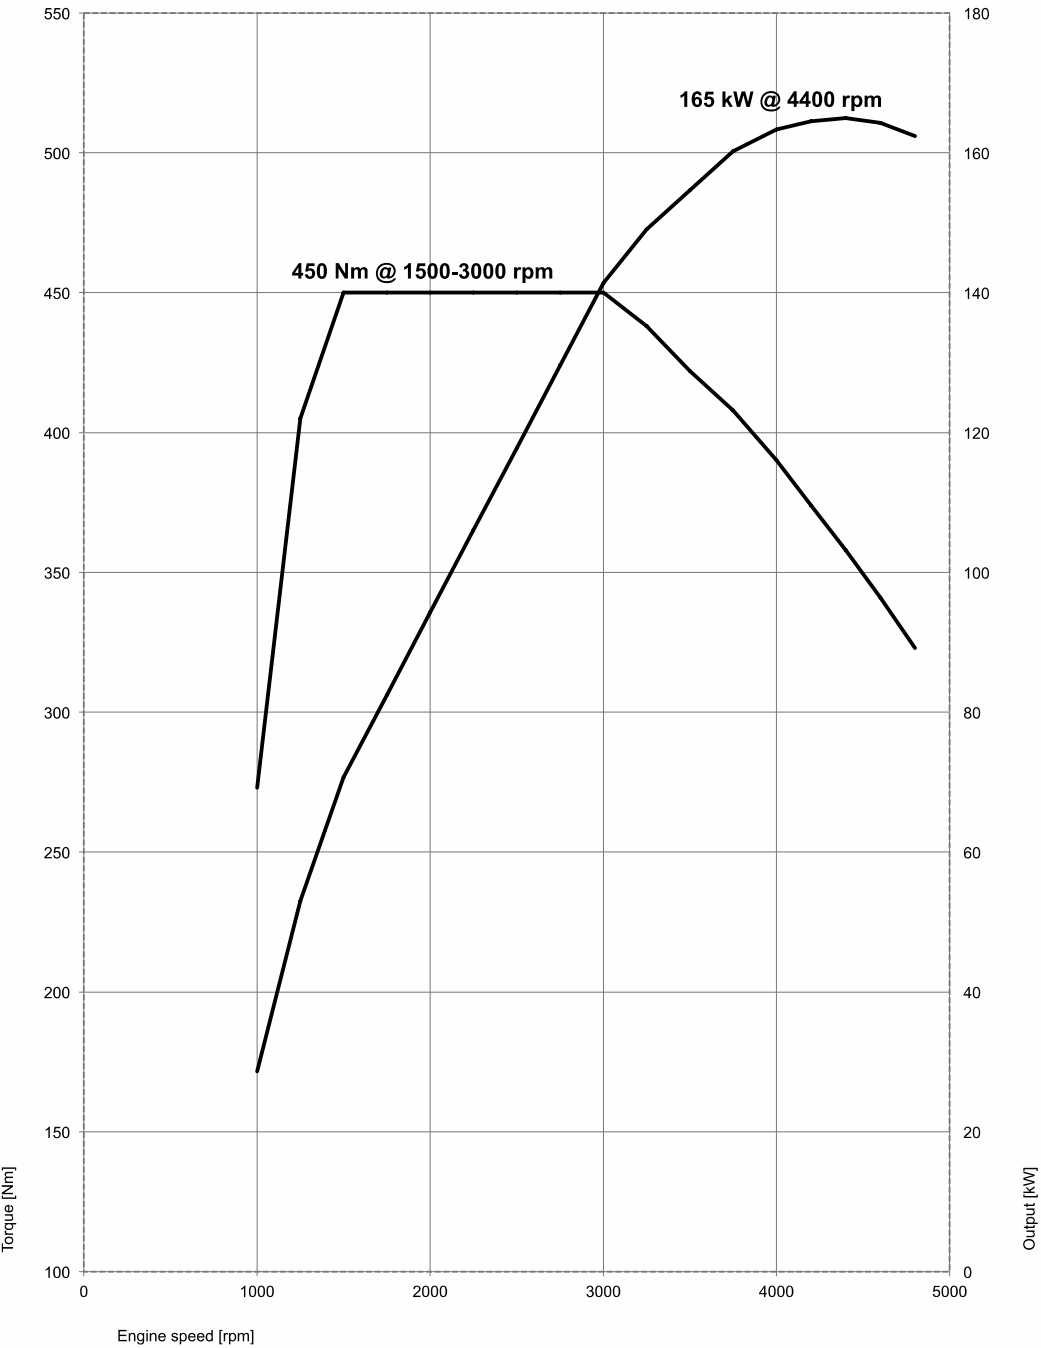

9. Exterior and interior dimensions.
3-door BMW 1 Series.

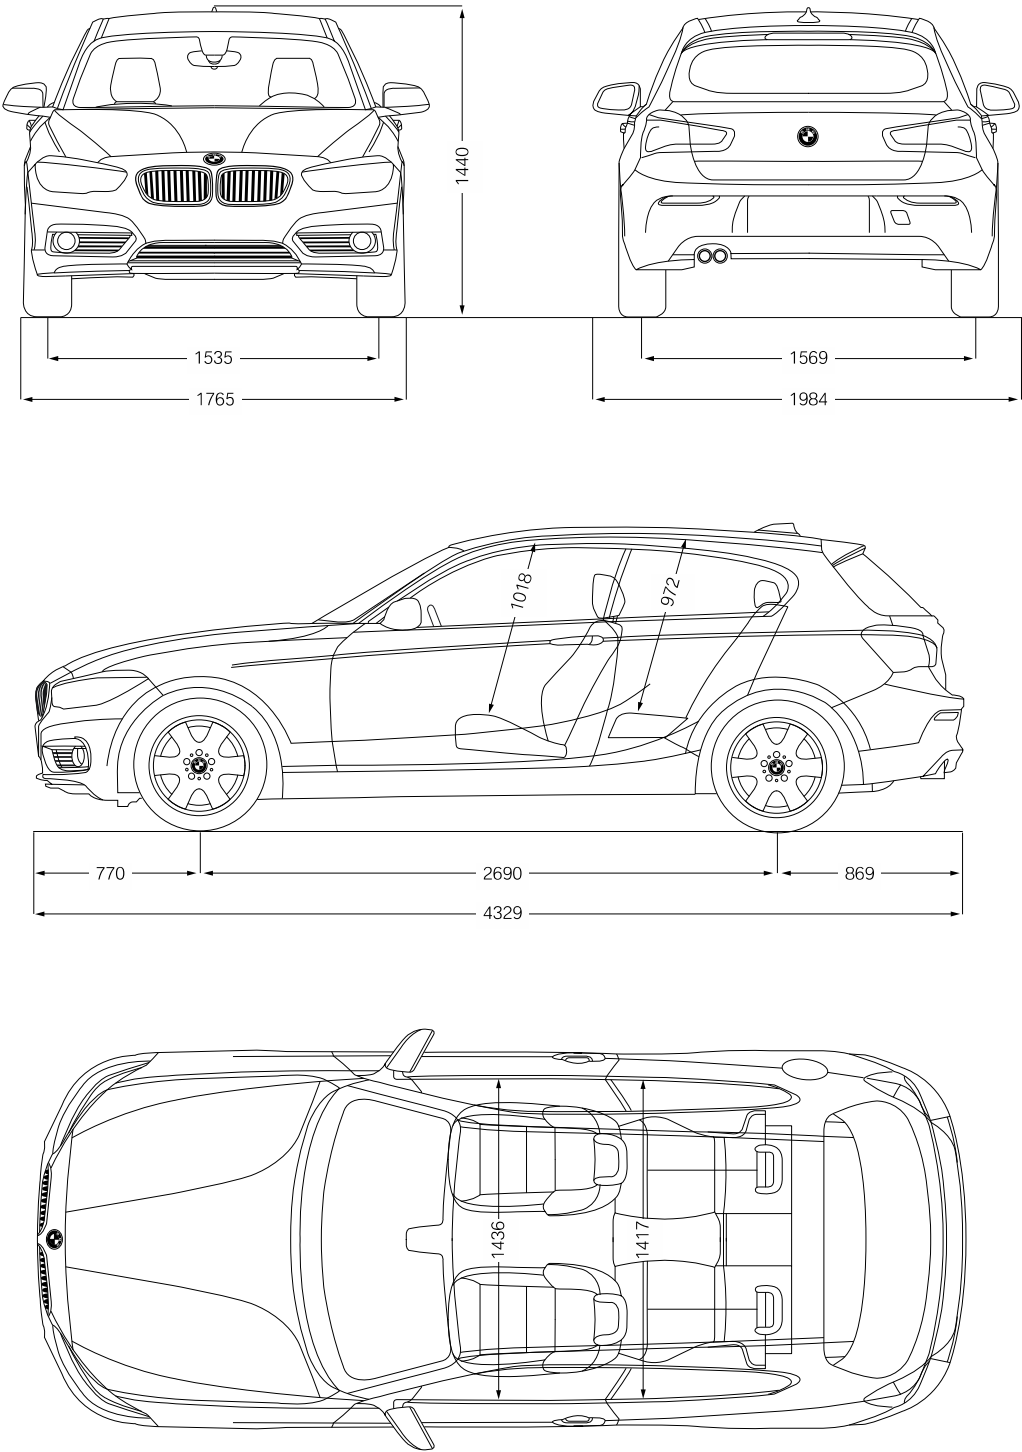

5-door BMW 1 Series.

